

Smart Systems





Smart Systems

The Company

Unique among systems companies is the internationally renowned Aliplast Group which has a turnover in excess of £200 million and employs 1300 people worldwide. Established in 1984 with its headquarters in Lokeren, Belgium, Aliplast is an aluminium systems company that has significant investment in firms located in France, China, Poland, Egypt and in the United Kingdom Smart Systems is the representative member of the group.

Smart Systems has over the past 25 years grown to become one of the UK's leading systems company with a reputation for product innovation, design expertise, technical competence and quality.

Located in Yatton, North Somerset, in its impressive modern 120,000 sq ft purpose built offices, warehouse and manufacturing plant the company has an annual turnover of £28 million and employs in excess of 100 people.

National Distribution Service

Smart Systems has a national distribution service with its own dedicated transport fleet of lorries making daily deliveries to its network of reputable fabricators and installers throughout the United Kingdom.



The Product Range

The company has an extensive range of products which are held in bar lengths and are available ex-stock. The product range includes casement windows that are externally or internally beaded, open-in/open-out; other windows with various opening facilities i.e. tilt/turn, projecting, fully reversible, pivot, sliding and heavy duty; doors that are commercial hinged, commercial swing, patio, slide folding, multi-track slide and automatic; glazed screen/shopfront; curtain walling; roof glazing and conservatories. The products are available as thermal break or non-thermal break aluminium and aluminium/PVC-U composite. There is also a specifically designed thermally broken direct replacement for steel windows. It incorporates slim sightlines and an appearance inspired by the traditional old style steel window. It is ideal for listed buildings and replica refurbishment projects where planning constraints are to be considered.

Website

For further information about our company, comprehensive product range and manufacturing facilities please visit our website at:

www.smartsystems.co.uk






Smart Thinking For Today's Markets

Design Expertise

Our team of technically competent designers use current CAD technology to produce innovative design solutions for specific markets.

Comprehensive technical manuals and data sheets giving full details of each system, including sections, components, drawings and fabrication details are available.

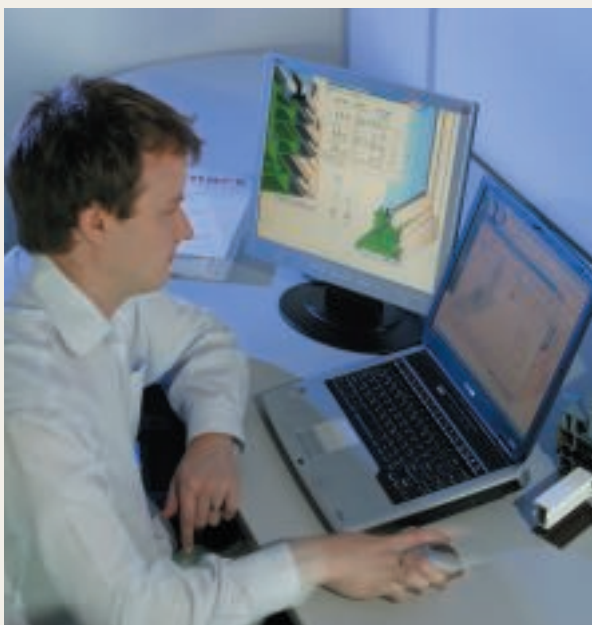

Assurance of Quality

Smart Systems is committed to high standards of quality and workmanship. In our view quality implies consistency, reliability and durability in terms of materials, product performance and service; quality equates with risk reduction – not just for our company but also for all our customers. It is for these reasons that we fully support independent certification and assessment schemes run by the BSI and BBA.

The Markets

Smart Systems offer a range of purpose designed products suitable for new buildings or refurbishment projects in the **architectural, commercial, public, new build and retail markets.**

Technical Sales

Our highly experienced team of Technical Sales personnel are available to assist and work closely with architects, specifiers, fabricators and installers on projects from inception of design through to fabrication and installation.

Training Facilities

The company has a designated workshop/training facility where product training is offered to its fabricators and other relevant individuals engaged within the industry. Smart Systems currently offer training courses to NVQ Standards.

Smart Systems are BS EN ISO 9001:2000 registered.



**MEMBERS OF
CWCT**



Important Note: The information contained in the above product finder is for guidance only. It should be read in conjunction with our technical manuals. The performance parameters may not be applicable to all designs. You should consult your supplier before finalising your designs.

Smart Systems

Environmental Policy


Smart Systems are committed to working towards a greener working environment and to ensuring that every aspect of our activities is conducted in accordance with sound environmental practices.

We plan to achieve this by:

- Minimising the consumption of natural resources and energy, whilst consuming material goods in moderation. We are resolved to use aluminium billets containing 30% re-cycled aluminium in our extrusion presses. Globally this will assist in reducing the demand for energy as the recycling process for aluminium requires only 5% of the energy necessary to create primary aluminium
- Reducing the creation of waste through the adoption of improved operating practices and by the recycling of materials whenever practical. By bringing our entire production all under one roof and by investing in on-site extrusion, painting and rolling facilities we aim to reduce the journeys our transport fleet make by 500,000 miles per year. We have instigated company wide recycling initiatives for all waste paper, cans and plastic
- Investing in the development of new products and modern processes/production facilities that have an improved performance regarding their impact on the environment. This means using the most efficient technology available thus enabling us to reduce wastage and cut out harmful industrial emissions
- Making sure that all waste and effluent is disposed of in a safe and responsible manner
- Ensuring that our company complies with environmental legislation
- Monitoring our progress towards the achievement of our aims for a greener working environment

Our objective is to promote among our staff, customers, suppliers and stakeholders an understanding of environmental issues in the context of our business. Our common task is to ensure that we continually improve the environmental impact of our total global activities.

This policy is recognition, by the company, of its responsibility towards safeguarding the environment and we publish this statement as a commitment by both management and employees to minimising the environmental impact of its operations.

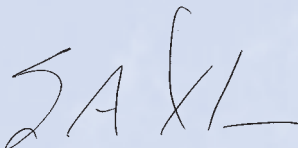

E. Robinson
Managing Director




The **MC Wall** is a curtain wall system designed to create a dramatic but practical façade, with the option of sloped and facet-shaped glazing whilst allowing maximum light into small or large multi-storey buildings. Rapid on-site installation and concealed transoms, for seamless/uninterrupted glass to glass joints, are among the many special features of this versatile polyamide thermal break system. The system incorporates a top hung frameless vent and also accommodates all Smarts windows, doors and horizontal sliders.

SC Frame is a curtain wall system designed for low to medium rise façades including large shopfronts and showrooms and accommodates a wide range of Smarts windows and doors. Rapid on-site installation is facilitated by the method of construction i.e. in ladder frames in the factory.




CURTAIN WALL


MC Wall

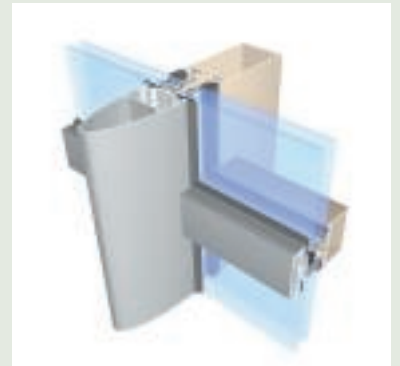

Horizontal Section

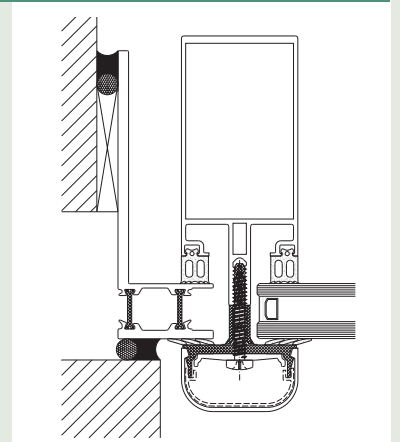

Vertical Section

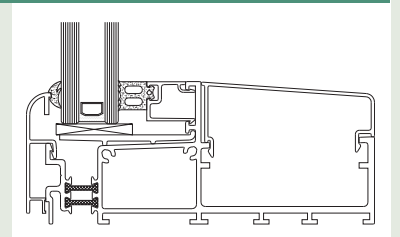

Trade Name

MC Wall

Building applications

Suitable for small and large multi-storey office buildings. Mullion and transom depths to suit design construction and structural requirements. Sloped glazing possible, straight and slightly facet-shaped vertical glass walls

Special features

Rapid on-site installation using stainless steel pin joints to connect transoms to mullions. Transom profiles have dedicated polyamide thermal break. Concealed transoms thereby giving glass to glass joints

Materials

Aluminium alloy 6060/6063 T5/T6 in condition F22 to NBN P21-001 and DIN 1725

Co-extruded profiles to DIN 7863, TV 110 NFP 85301, ISO 3994

Thermal break: polyamide strips PA 6.6. 25% reinforced with glass fibre

Seals: EPDM to DIN 7863, TV 110 NFP 85301, ISO 3994

Finish

Polyester powder coat to BS 6496/APA-Qualicoat Guidelines. Anodised satin or bronze colours with EWAA/EURAS-Qualinod quality label Dual colour available

Profile width

55mm

Depth of frame

79mm – 250mm

Glass

Glazing options from 24mm to 33mm and single glazing

Sash inserts

MC Wall top hung frameless vent. Accommodates all Smarts windows, doors and horizontal sliders.

Weather performance

Tests conducted in accordance with STS 52.0 Complies with Doc. L for thermal transmittance Test Report available on request





This curtain wall system was designed to provide optimum thermal performance and for ease of installation. It offers the facility to be finished externally with several decorative beads. In addition to traditional front walls with horizontal and vertical protruding lines, this system can also be used to construct a semi-structural front wall, with the outside front wall showing only vertical protruding cover caps. Tanagra offers straight and slightly facet-shaped vertical glass walls and is suitable for small and large office buildings.




CURTAIN WALL


Tanagra



Horizontal Section

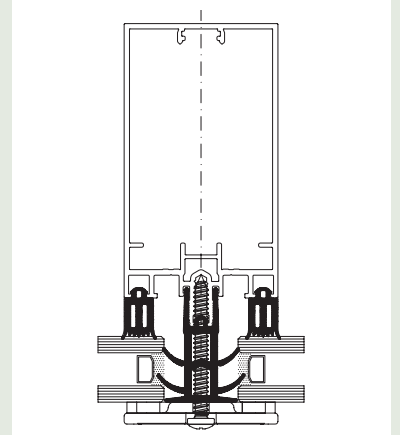

Vertical Section

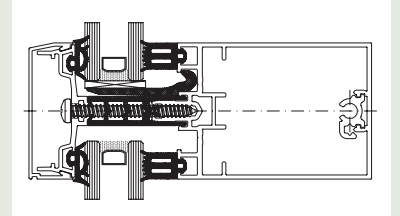

Trade Name

Tanagra

Building applications

Suitable for small and large multi-storey office buildings.
Straight and slightly facet-shaped vertical glass walls.
Semi-structural front walls with vertically protruding cover caps.

Special features

Rapid on-site installation using stainless steel pin joints to connect transoms to mullions. Polyamide thermal break profiles.
Decorative bead options for finishing external face.
Traditional front walls with horizontally and vertically protruding lines. Can also be used to construct a semi-structural front wall with the outside of the front wall showing vertically protruding cover caps only.

Materials

Aluminium alloy 6060/6063 T5/T6 in condition F22 to NBN P21-001 and DIN 1725

Co-extruded profiles to DIN 7863, TV 110
NFP 85301, ISO 3994

Thermal break: polyamide strips PA 6.6.
25% reinforced with glass fibre

Seals: EPDM to DIN 7863, TV 110
NFP 85301, ISO 3994

Finish

Polyester powder coat to BS 6496/APA-Qualicoat
Guidelines in RAL colours. Anodised satin or bronze colours with EWAA/EURAS-Qualinod quality label
Dual colour available. Wood-effect colour available (powder coated according to Qualicoat).

Profile width

55mm (mullion)

Depth of frame

79mm – 250mm

Glass

Glazing options from 24mm to 33mm and single glazing

Sash inserts

Accommodates all Smarts windows, doors and horizontal sliders.

Weather performance

Tests conducted in accordance with STS 52.0
Complies with Doc. L for thermal transmittance
Test Report available on request





Our Shopfront system Shopline is specifically designed for all ground floor treatments and severe duty doors. It is stylish, practical and accommodates all Smarts windows and horizontal sliders. It offers various sightline options to the head, midrail and cill detail as well as anti finger-trap stiles and concealed transom closers.

The versatility of the system is amply demonstrated by the variety of installations depicted in this brochure. Designed to be robust, our shopfront system will withstand heavy traffic in commercial buildings such as high street shops/store, office buildings, health clubs and many others.




SHOP FRONT


Shopline



Horizontal Section

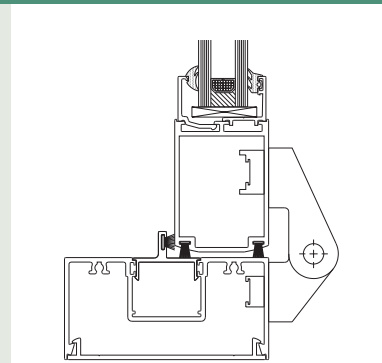

Vertical Section

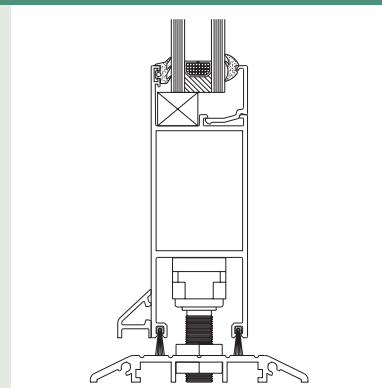

Trade Name

Shopline

Building applications

Designed for all ground floor treatments and severe duty doors

Special features

Various sightline options to head, midrail and cill detail.
Anti finger-trap stiles and concealed transom closers.
Doc. M compliant thresholds

Materials

Aluminium alloy 6060/6063 T5/T6 in condition F22 to NBN P21-001 and DIN 1725

Seals: EPDM to DIN 7863, TV 110
NFP 85301, ISO 3994

Finish

Polyester powder coat to BS 6496/APA-Qualicoat Guidelines.
Anodised satin or bronze colours with EWAA/EURAS-Qualinod quality label

Profile width

50mm

Depth of frame

100mm

Glass

Single glazing profiles accommodate 6mm - 12mm glass
Double glazing profiles accommodate 24mm - 28mm glass

Sash inserts

Accommodates all Smarts windows and horizontal sliders.

Performance

Complies with Doc. L for thermal transmittance





This system was specifically designed as a thermally broken direct replacement for steel windows. It incorporates slim sightlines and an appearance inspired by the traditional old style steel window. It is ideal for listed buildings and replica refurbishment projects where planning constraints are to be considered.

The Evolution system is designed to be built as a series of horizontal modules which can be stacked using horizontal couplers and provides an ideal solution where there is a requirement for a prestigious and thermally advanced window system.




WINDOWS


Evolution



Horizontal Section

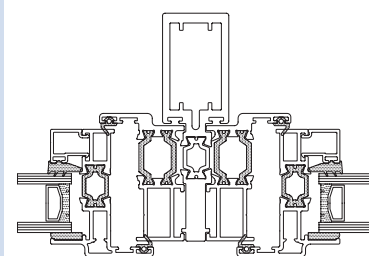

Vertical Section



Trade Name

Evolution

Building applications

Designed as a thermally broken replacement for old steel windows and for use as fixed lights and open out windows. It is an internally beaded tape glazed system suitable for both commercial and domestic applications.

Special features

System designed to be built as a series of horizontal modules which can be stacked using horizontal couplers. Designed for high thermal efficiency using slimline profiles. Chamfered or square main profile options. High security glazing and shoot-bolt locking options. Ideal for listed buildings and replica refurbishment projects

Materials

Aluminium alloy 6060/6063 T5/T6 in condition F22 to NBN P21-001 and DIN 1725. Complies with BS EN 12020-2: 2001/BS 755-9: 2001

Thermal break: polyamide strips PA 6.6. 25% reinforced with glass fibre

Seals: EPDM to DIN 7863, TV 110 NFP 85301, ISO 3994

Finish

Polyester powder coat to BS 6496/APA-Qualicoat Guidelines. Anodised satin or bronze colours with EWAA/EURAS-Qualinod quality label Dual colour available

Profile width

Various options depending on design considerations

Depth of frame

47mm

Glass

24 mm glazing

Sash inserts

Top or side hung opening options

Performance

Weather tested in accordance with BS6375 Pts 1 & 2 Complies with Doc. L for thermal transmittance



Innovative designs and a comprehensive range of windows suitable for the architectural, commercial, public, new build and retail markets are hallmarks of Smart Systems.

Our window ranges include casements (top/side hung, fixed lights and any combination of these), tilt and turn, hopper, tilt and slide, projecting, fully reversible, pivot (horizontal or vertical), sliding and heavy duty. Windows are available externally or internally beaded, open-in/open-out, with polyamide thermal barrier or as an aluminium/PVC-U composite frame for high performance thermal efficiency. High security glazing, shoot-bolt locking, dual colour options, excellent weather performance (BS6375 Pts 1 & 2), compliance with BS7950 and a choice of ovolo, chamfered or square main profiles are just some of the many special features of our window systems.




WINDOWS


Visoline



Horizontal Section



Vertical Section

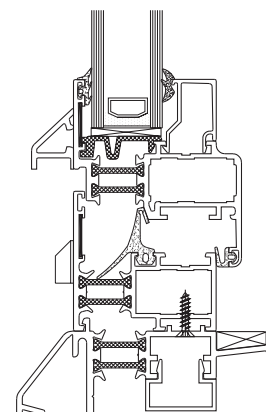

Trade Name

Visoline

Building applications

Designed for use as fixed lights, tilt and turn, single or double sash, side hung (open in/out), tilt in, side or top hung (open out), horizontal or vertical pivot and tilt and slide windows. All options are internally beaded for use on domestic and all commercial applications

Special features

All applications are internally glazed with square or round edge beads
Polyamide thermal break allowing dual colour option
Profiles span full height i.e. floor to ceiling

Materials

Aluminium alloy 6060/6063 T5/T6 in condition F22 to NBN P21-001 and DIN 1725

Thermal break: polyamide strips PA 6.6.
25% reinforced with glass fibre

Seals: EPDM to DIN 7863, TV 110
NFP 85301, ISO 3994

Finish

Polyester powder coat to BS 6496/APA-Qualicoat Guidelines.
Anodised satin or bronze colours with EWAA/EURAS-Qualinod quality label
Dual colour available

Profile width

Various options depending on design considerations

Depth of frame

51mm

Glass

Glazing options from 4mm to 38mm

Sash inserts

See "Building Applications" above

Performance

Weather tested in accordance with BS6375 Pts 1
Security tested to BS7950
Tested to NEN-norm 5096. Security tested by SKG
Complies with Doc. L for thermal transmittance
Test Reports are available on request






Our range of windows are compatible with a range of accessories, locking mechanisms and are available in a wide range of colours and finishes that comply with all relevant British and/or European standards. Compliance with Document L for thermal transmittance applies.

Smart's window systems offer excellent weather performance/ratings in accordance with the requirements of British Standards. BSI test certificates and BSI Kitemark test reports, where applicable, are available on request.




WINDOWS


Alitherm

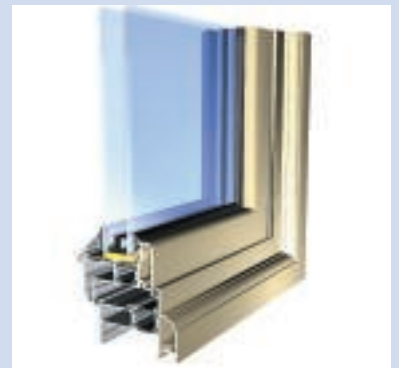

Horizontal Section



Vertical Section

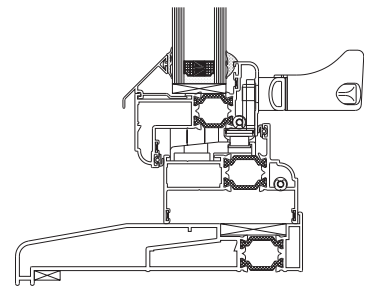

Trade Name

Alitherm

Building applications

Designed for use as fixed lights and open out windows, internally or externally beaded for domestic and light/medium commercial applications.

Special features

Designed for high thermal efficiency using slimline profiles
Ovolo, chamfered or square main profile options
High security glazing and shoot-bolt locking options

Materials

Aluminium alloy 6060/6063 T5/T6 in condition F22 to NBN P21-001 and DIN 1725

Thermal break: polyamide strips PA 6.6, 25% reinforced with glass fibre

Seals: EPDM to DIN 7863, TV 110
NFP 85301, ISO 3994

Finish

Polyester powder coat to BS 6496/APA-Qualicoat Guidelines.
Anodised satin or bronze colours with EWAA/EURAS-Qualinod quality label
Dual colour available

Profile width

Various options depending on design considerations

Depth of frame

47mm, 55mm and 70mm

Glass

Glazing options 24mm, 28mm and 32mm

Sash inserts

Top or side hung opening options

Performance

Weather tested in accordance with BS6375 Pts 1 & 2*
Security tested to BS7950*
Complies with Doc. L for thermal transmittance

*BSI Kitemark Test Reports are available on request





Smart Systems offer a range of doors suitable for the architectural, commercial, public, new build and retail markets. The doors available are commercial hinged, commercial swing, patio, tilt and slide, slide folding, multi-track slide and automatic. Our doors are designed for use as open out or open in, single or double doors, internally or externally beaded with side-light options for domestic and/or commercial applications. Doors are available with polyamide thermal barrier or as aluminium/PVC-U composite frames for high performance thermal efficiency.

High security glazing, locking mechanisms including security deadlock and hook bolts, dual colour options, excellent weather performance (BS6375 Pt 1) are some of the many special features of our door systems.




DOORS


Visoline



Horizontal Section

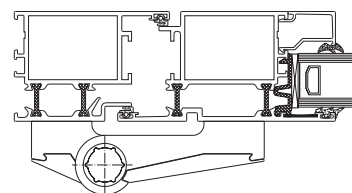

Vertical Section

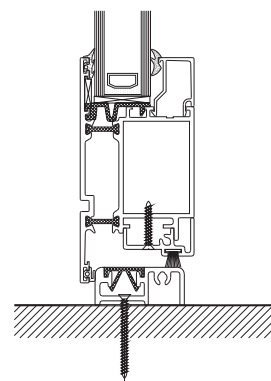

Trade Name

Visoline

Building applications

Designed for use as open out or open in, single or double doors, Internally beaded with side-light options for domestic and Light/medium commercial applications.

Single door - Max width 950mm. Max height 2400mm

Double door - Max width 1800mm. Max height 2400mm

Subject to agreement it is possible to exceed these limitations depending on design criteria

Special features

All applications are internally glazed with square or round edge beads

Polyamide thermal break allowing dual colour option

Materials

Aluminium alloy 6060/6063 T5/T6 in condition F22 to NBN P21-001 and DIN 1725

Thermal break: polyamide strips PA 6.6. 25% reinforced with glass fibre

Seals: EPDM to DIN 7863, TV 110 NFP 85301, ISO 3994

Finish

Polyester powder coat to BS 6496/APA-Qualicoat Guidelines.

Anodised satin or bronze colours with

EWAA/EURAS-Qualinod quality label

Dual colour available

Profile width

Various options depending on design considerations

Depth of frame

51mm

Glass

Glazing options from 4mm to 38mm

Sash inserts

Allows for fully framed or low threshold door sashes

Performance

Weather tested in accordance with BS6375 Pts 1

Tested to NEN-norm 5096. Security tested by SKG

Complies with Doc. L for thermal transmittance

Test Report available on request





Our doors are compatible with a range of furniture and locking mechanisms and are available in a wide range of colours and finishes that comply with all relevant British and/or European standards. Compliance with Document L for thermal transmittance applies.

Design flexibility, durability and fitness for purpose are key factors that project managers, architects and specifiers will discover when they opt for our commercial doors – whether required for refurbishment or new build projects Smart's doors are designed for rigorous use and heavy traffic.

Test Reports are available on request




DOORS


Visoglide



Horizontal Section

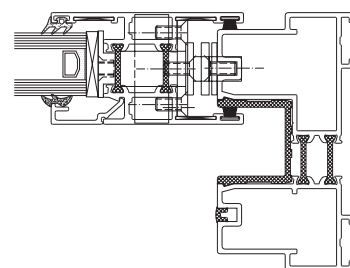

Vertical Section



Trade Name

Visoglide

Building applications

Designed for use as fixed lights and horizontal sliding doors internally beaded for domestic and all commercial applications

Weight limit 200Kg. Height limit 2550mm

Special features

2, 3, 4 and 6 door panels available

All applications are internally glazed with square beads
Polyamide thermal break allowing dual colour option

Materials

Aluminium alloy 6060/6063 T5/T6 in condition F22 to NBN P21-001 and DIN 1725

Thermal break: polyamide strips PA 6.6. 25% reinforced with glass fibre

Glazing seals: EPDM to DIN 7863, TV 110

NFP 85301, ISO 3994

Weatherseals: Woolpile

Finish

Polyester powder coat to BS 6496/APA-Qualicoat Guidelines.

Anodised satin or bronze colours with

EWAA/EURAS-Qualinod quality label

Dual colour available

Profile width

Head, cill and jamb 116mm

Mullion 83mm and bi-parting stiles 158mm

Depth of frame

Two track 99mm and three track 155mm

Glass

Glazing options from 4mm to 28mm

Sash inserts

Fixed lights and horizontal sliding panels

Performance

Weather tested in accordance with BS6375 Pts 1

Tested to NEN-norm 5096. Security tested by SKG

Complies with Doc. L for thermal transmittance

Test Reports are available on request





Our Visofold folding doors are constructed from profiles with a thermal break. Robust sections enable the creation of large passage-ways providing maximum natural light and panoramic views. Moveable panels that can be folded up to the left or right sit within an outerframe. The system offers flexibility in terms of the possible combinations of folding elements and opening sashes.

This door system can be used in a variety of properties including private domestic dwellings, conservatories, hotels, restaurants and stores to open up a complete wall to create a larger space particularly advantageous in the summer.




DOORS


Visofold



Horizontal Section

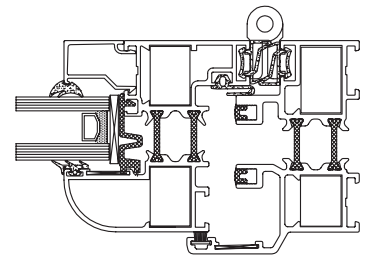

Vertical Section

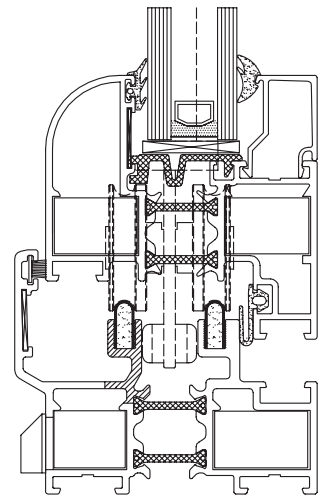

Trade Name

Visofold

Building applications

Designed for use as doors for single/double (open in or out), sliding and folding screens (open in or out) internally beaded for use in domestic dwellings, as a screen in conservatories and on all commercial applications e.g. hotels, restaurants, and stores

Special features

All applications are internally glazed with square or round edge beads. Polyamide thermal break allowing dual colour option

Materials

Aluminium alloy 6060/6063 T5/T6 in condition F22 to NBN P21-001 and DIN 1725

Thermal break: polyamide strips PA 6.6. 25% reinforced with glass fibre

Glazing seals: EPDM to DIN 7863, TV 110 NFP 85301, ISO 3994.

Weather seals: Woolpile and EPDM

Finish

Polyester powder coat to BS 6496/APA-Qualicoat Guidelines. Anodised satin or bronze colours with EWAA/EURAS-Qualinod quality label Dual colour available. Wood-effect colour available (powder coated according to Qualicoat).

Profile width

Various options depending on design considerations

Depth of frame

Outerframe 78mm, Sash 70mm

Glass

Glazing options from 4mm to 38mm

Sash inserts


Visoline window types

Weather performance

Tests conducted in accordance with STS 52.0. Complies with Doc. L for thermal transmittance Test Report available on request




Duotherm Window

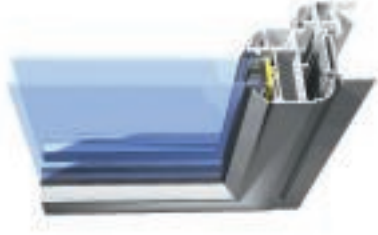

Duotherm Door



Alitherm Door

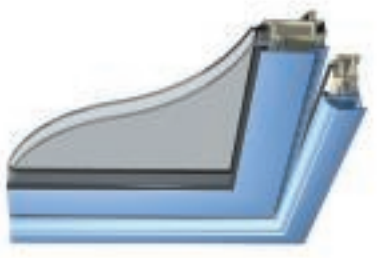

Building applications

Designed for use as fixed lights, tilt and turn, fully reversible side or top hung open out windows, internally or externally beaded for domestic and light/medium commercial applications.

Designed for use as open out or open in, single or double doors, internally or externally beaded with side-light options for domestic and light/medium commercial applications.

Designed for use as open out or open in, single or double doors, internally or externally beaded with side-light options for domestic and light/medium commercial applications.

Special features

Designed for high thermal efficiency – Structural aluminium sections are clad internally with PVC-U profiles. Ovalo, chamfered or square main profile options High security glazing and shoot-bolt locking

Designed for high thermal efficiency – Structural aluminium sections are clad internally with PVC-U profiles. Ovalo, chamfered or square main profile options High security glazing and three point locking

Polyamide thermal break allowing dual colour option

Materials

Aluminium alloy 6060/6063 T5/T6 to comply with BS EN 12020-2: 2001/BS7599-9:2001

Aluminium alloy 6060/6063 T5/T6 in condition F22 to NBN P21-001 and DIN 1725

Internal PVC-U window grade profile to BS7413 Glazing and weatherseals comply with BS4255 and BS4255 Pt 1

Internal PVC-U window grade profile to BS7413 Glazing and weatherseals comply with BS4255 and BS4255 Pt 1

Thermal break: polyamide strips PA 6.6. 25% reinforced with glass fibre
Seals: EPDM to DIN 7863, TV 110
NFP 85301, ISO 3994

Finish

Polyester powder coat paint finish to BS 6496. Dual colour available. Standard RAL colours supplied. Anodised finish AA25 to BS3987. Woodgrain finishes in mahogany and light oak

Polyester powder coat to BS 6496/APA-Qualicoat Guidelines. Anodised satin or bronze colours with EWAA/EURAS-Qualinod quality label Dual colour available

Profile width

Various options depending on design considerations

Various options depending on design considerations

Depth of frame

51mm and 70mm

47mm or 70mm

Glass

Glazing options 20mm, 24mm, 28mm or 32mm

Glazing options 24mm, 28mm and 32mm

Sash inserts

Top or side hung opening, tilt and turn and top swing fully reversible options

Allows for fully framed or low threshold door sashes


Performance

Weather tested in accordance with BS6375 Pt 1 Complies with Doc. L for thermal transmittance Test Reports are available on request

Complies with Doc. L for thermal transmittance Test Report available on request

Weather tested in accordance with BS6375 Pt 1 Complies with Doc. L for thermal transmittance Test Report available on request

Imperial Window

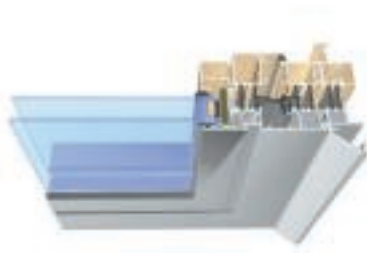

Designed for use as fixed lights, tilt and turn, single or double sash, side hung (open in/out), tilt in, side or top hung (open out), horizontal or vertical pivot and tilt and slide windows. All options are internally beaded for use on domestic and all commercial applications
Doors are also available as part of this range

All applications are internally glazed with square or round edge beads
Polyamide thermal break allowing dual colour option
Profiles span full height i.e. floor to ceiling

Aluminium alloy 6060/6063 T5/T6 in condition F22 to NBN P21-001 and DIN 1725
Thermal break: polyamide strips PA 6.6. 25% reinforced with glass fibre
Seals: EPDM to DIN 7863, TV 110
NFP 85301, ISO 3994

Polyester powder coat to BS 6496/APA-Qualicoat Guidelines.
Anodised satin or bronze colours with EWAA/EURAS-Qualinod quality label
Dual colour available

Various options depending on design considerations


65mm

Glazing options from 4mm to 51mm

See "Building Applications" above

Weather tested in accordance with BS6375 Pt 1
Tested to NEN-norm 5096. Security tested by SKG
Complies with Doc. L for thermal transmittance
Test Reports are available on request

Intruder Window



Designed for use as fixed lights, top or side hung, open out windows, externally beaded for domestic and all commercial applications

Polyamide thermal break allowing dual colour option

Aluminium alloy 6060/6063 T5/T6 in condition F22 to NBN P21-001 and DIN 1725
Thermal break: polyamide strips PA 6.6. 25% reinforced with glass fibre
Seals: EPDM to DIN 7863, TV 110
NFP 85301, ISO 3994

Polyester powder coat to BS 6496/APA-Qualicoat Guidelines.
Anodised satin or bronze colours with EWAA/EURAS-Qualinod quality label
Dual colour available

Various options depending on design considerations

51mm and 70mm

Glazing options from 4mm to 8mm single glazed and 17mm to 32mm double glazed

See "Building Applications" above

Weather tested in accordance with BS6375 Pts 1
Security tested to BS7950
Complies with Doc. L for thermal transmittance
Test Reports are available on request

Reversible Window



Designed for use as fixed lights, and open out top swing reversible windows. Internal beading to vent with the option of internal/external beaded fixed light.
For use on domestic and light/medium commercial applications

Polyamide thermal break allowing dual colour option

Aluminium alloy 6060/6063 T5/T6 in condition F22 to NBN P21-001 and DIN 1725
Thermal break: polyamide strips PA 6.6. 25% reinforced with glass fibre
Seals: EPDM to DIN 7863, TV 110
NFP 85301, ISO 3994

Polyester powder coat to BS 6496/APA-Qualicoat Guidelines.
Anodised satin or bronze colours with EWAA/EURAS-Qualinod quality label
Dual colour available

Various options depending on design considerations

51mm

Glazing options from 18mm to 28mm

Reversible sash

Weather tested in accordance with BS6375 Pt 1
Security tested to BS7950
Complies with Doc. L for thermal transmittance
Test Reports are available on request

Building applications

Special features

Materials

Finish

Profile width

Depth of frame

Glass


Sash inserts

Performance


Slide Window



Superial Window



Triline Window



Building applications

Designed for use as fixed lights, horizontal sliding windows and doors, wrap around glazing, for domestic and light/medium commercial applications
Max glass load 120Kg/sliding panel

Designed for use as fixed lights, tilt and turn, single or double sash, side hung (open in/out), tilt in, side or top hung (open out), horizontal or vertical pivot and tilt and slide windows. All options are internally beaded for use on domestic and all commercial applications

Special features

2, 3, 4 and 6 door panels available
Polyamide thermal break allowing dual colour option
Single through to four point locking available

All applications are internally glazed with square or round edge beads
Polyamide thermal break allowing dual colour option
Profiles span full height i.e. floor to ceiling

Materials

Aluminium alloy 6060/6063 T5/T6 in condition F22 to NBN P21-001 and DIN 1725
Thermal break: polyamide strips PA 6.6, 25% reinforced with glass fibre
Glazing seals: EPDM to DIN 7863, TV 110 NFP 85301, ISO 3994.
Weatherseals: Woolpile

Aluminium Alloy 6060/6063 T5 in condition F22 (according to NBN P21-001 and DIN 1725)
Sealings: EPDM according to DIN 7863, TV 110, NFP 85301, ISO 3994
Thermal break: polyamide strips PA 6.6, 25% reinforced with glass fibre

Aluminium alloy 6060/6063 T5/T6 in condition F22 to NBN P21-001 and DIN 1725
Thermal break: polyamide strips PA 6.6, 25% reinforced with glass fibre
Seals: EPDM to DIN 7863, TV 110 NFP 85301, ISO 3994

Finish

Polyester powder coat to BS 6496/APA-Qualicoat Guidelines.
Anodised satin or bronze colours with EWAA/EURAS-Qualinod quality label
Dual colour available

Polyester powder coat to BS 6496/APA-Qualicoat Guidelines.
Anodised satin or bronze colours with EWAA/EURAS-Qualinod quality label
Dual colour available

Profile width

Various options depending on design considerations

Various options depending on design considerations

Depth of frame

Various options depending on design considerations

51mm

Glass

Glazing options from 6mm to 9mm single glazed
And double glazed from 20mm to 24mm

Glazing options from 4mm to 38mm

Sash inserts

Horizontal sliding panels only

See "Building Applications" above


Performance

Tested to NEN-norm 5096. Security tested by SKG
Complies with Doc. L for thermal transmittance
Test Reports are available on request

Tests conducted in accordance with STS 52.0
Complies with Doc. L for thermal transmittance
Test Report available on request

Tested to NEN-norm 5096. Security tested by SKG
Complies with Doc. L for thermal transmittance
Test Reports are available on request

Superglide Door



Building applications

Designed to separate terrace areas and living quarters in houses and flats. Provides separations for conservatories looking out onto the garden and also creates space in passage-ways.

Special features

Thermal break system for patio doors (2, 3, 4 & 6 pane) and windows with thermal break

Materials

Aluminium Alloy 6060/6063 T5 in condition F22 (according to NBN P21-001 and DIN 1725)

Sealings: EPDM according to DIN 7863, TV 110, NFP 85301, ISO 3994

Thermal break: polyamide strips PA 6.6.25% reinforced with glass fibre

Finish

Polyester powder coat to BS 6496/APA-Qualicoat Guidelines. Anodised satin or bronze colours with EWAA/EURAS-Qualinod quality label. Dual colour available.

Wood-effect colour available (powder coated according to Qualicoat)

Profile width

Various options depending on design considerations

Depth of frame

Outer frame 116 mm

Glass

Glazing from 4 to 38 mm

Sash inserts


Performance

Tests conducted in accordance with STS 52.0

Complies with Doc. L for thermal transmittance

Test Report available on request

SC Frame

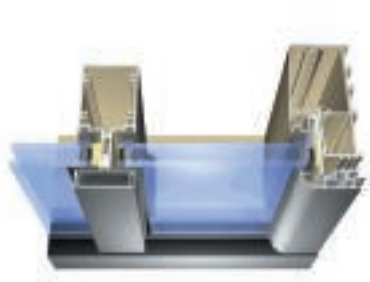

Suitable for low to medium rise façades including large shopfronts and showrooms, where ease of installing large panes of glass is a pre-requisite.

Constructed in ladder frames in the factory allowing rapid on-site installation. Stainless steel self-tapping screws are used through the mullion into integral cores within the transom or a cleating method can be used for manufacture

Aluminium alloy 6060/6063 T5/T6 in condition F22 to NBN P21-001 and DIN 1725

Thermal break and seals: EPDM to DIN 7863, TV 110 NFP 85301, ISO 3994

Polyester powder coat to BS 6496/APA-Qualicoat Guidelines.

Anodised satin or bronze colours with EWAA/EURAS-Qualinod quality label. Dual colour available

55mm

75mm, 100mm and 125mm

Single glazing 6mm, 10mm and 12mm and double glazing 24mm, 28mm and 32mm

Accommodates Smarts Intruder, Alitherm, Visoline and Slide Windows and Doors.

Complies with Doc. L for thermal transmittance

We reserve the right to make changes to the product specification as technical developments dictate and without prior notice.

Pictures shown in this brochure are for illustrative purposes only and are not binding in detail, colour or specification.

Alitherm, Duotherm, Imperial, Intruder, MC Wall, SC Frame, Shopline, Slide, Triline, Visofold, Visoglide and Visoline are trademarks of Smart Systems Ltd.

© Smart Systems Ltd 2007

